


# Unipi Axon S155

## PRODUCT DESCRIPTION

Unipi Axon S155 is a programmable logic controller (PLC) and gateway designed for automation, control, regulation and monitoring. The S155 is a compact model with a universal architecture combining digital and analog I/Os suitable for simple installations. A special feature of the S155 is a pair of Ethernet ports that allows the controller to be used as a hub between two networks, or to act as a network switch. The S155 also features three serial interfaces (RS485+RS232) for connection of extension modules or gateways and a 1-Wire interface for connection of digital temperature or humidity sensors.

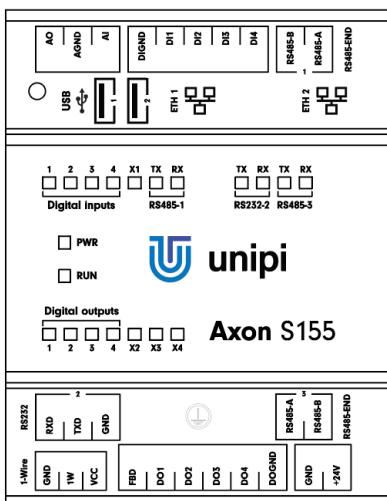

## COMPUTING MODULE

Allwinner H5 1.2 GHz quad-core CPU, 1GB RAM, 8GB eMMC onboard memory

## FEATURES

### Inputs/outputs

- 4 × digital input incl. counter
- 4 × digital output
- 1 × analog input
- 1 × analog output

### Software

- Powered by OS Linux
- Mervis – IDE (IEC 61131-3), HMI editor, proxy server, cloud database, SCADA, wide range of supported protocols
- Open-source solutions – Node-RED, openHAB, Homebridge, FHEM, PiDome, DomoticGa, Domoticz, Pimatic and many more
- Custom SW implementation – EVOK open API, Modbus TCP interface, SysFS

## FUNCTIONALITY

Automation, IoT and IIoT, remote online monitoring and regulation, HVAC control, SCADA, sensorics, smart home control (lighting, doors, locks, irrigation etc.)

### Communication interfaces

- 2 × RS485
- 1 × RS232
- 1 × 1-Wire bus
- 1 × 1Gbit Ethernet
- 1 × 10/100Mbit Ethernet
- 2 × USB 2.0

### Other features

- Built-in webserver
- Special functions – Direct Switch, MasterWatchdog, user LEDs
- Durable aluminium chassis (IP20)
- Extended operating temperature range
- Available in an OEM variant
- Custom development available (IQRF, LoRa, wM-Bus, ZigBee, EnOcean and more)

# Unipi Axon S155

## • Communication

|                                   |   |
|-----------------------------------|---|
| <b>Ethernet</b>                   | 1 × 1Gbit Ethernet<br>1 × 10/100Mbit Ethernet |
| <b>Serial/bus channels</b>        | 2 × RS485, 1 × RS232, 1 × 1-Wire              |
| <b>RS485 1 transmission speed</b> | 134 baud .. 115 200 baud                      |
| <b>RS485 3 transmission speed</b> | 50 baud .. 3 Mbaud                            |
| <b>RS485 galvanic isolation</b>   | Yes   |
| <b>RS485 biasing resistors</b>    | Yes, 560 Ω                                    |
| <b>RS485 terminating resistor</b> | Builtin attachable, 120 Ω                     |
| <b>RS232 transmission speed</b>   | 50 baud .. 3 Mbaud                            |
| <b>RS232 galvanic isolation</b>   | No  |
| <b>1-Wire galvanic isolation</b>  | Yes   |
| <b>1-Wire output voltage Vcc</b>  | 5 V   |
| <b>1-Wire max. current Vcc</b>    | 50 mA   |
| <b>1-Wire connector</b>           | 3 × pole, max. 1.5 mm <sup>2</sup>            |
| <b>WiFi</b>                       | IEEE 802.11 b/g/n                             |
| <b>Bluetooth</b>                  | 4.0, Low Energy (BLE)                         |
| <b>WiFi/Bluetooth antenna</b>     | Internal                                      |
| <b>USB</b>                        | 2 × USB 2.0                                   |

## • Digital inputs

|   |  |
|---|--|
| <b>Nr.of inputs × groups</b>                  | 4 × 1  |
| <b>Common connector</b>                       | DIGND  |
| <b>Galvanic isolation</b>                     | Yes  |
| <b>Functions of inputs</b>                    | Counter (incl. memory), signalization, Direct Switch |
| <b>Max. frequency of counter input signal</b> | 10 kHz   |
| <b>Input voltage of log. 0</b>                | Max. 3 V DC  |
| <b>Input voltage of log. 1</b>                | Min. 7 V DC  |
| <b>Max. input voltage</b>                     | 35 V DC  |
| <b>Input resistance</b>                       | 6 200 Ω  |
| <b>Delay 0-&gt;1/1-&gt;0</b>                  | 20 µs / 60 µs  |

## • Digital outputs

|   |                                 |
|---|---------------------------------|
| <b>Nr.of outputs × groups</b>             | 4 × 1                           |
| <b>Common connector</b>                   | DOGND                           |
| <b>Galvanic isolation</b>                 | No                              |
| <b>Type of output</b>                     | NPN transistor (open collector) |
| <b>Optional functions</b>                 | PWM                             |
| <b>Switchable voltage</b>                 | 5–50 V DC                       |
| <b>Switchable current continual/pulse</b> | 750 mA / 1 A                    |
| <b>Max. total current DO1 – DO4</b>       | 1 A                             |
| <b>PWM max. frequency</b>                 | 200 kHz                         |
| <b>PWM max. resolution</b>                | 16 bits                         |

## • Analog inputs

|                                      |                        |
|--------------------------------------|------------------------|
| <b>Nr.of inputs × groups</b>         | 1 × 1                  |
| <b>Common connector</b>              | AGND                   |
| <b>Available functions</b>           | 0–10 V<br>0–20 mA      |
| <b>Galvanic isolation</b>            | No                     |
| <b>Resolution</b>                    | 12 bits                |
| <b>Conversion speed</b>              | 10 µs                  |
| <b>Input resistance</b>              | 66 kΩ – U<br>100 Ω – I |
| <b>Resistance measurement method</b> | —                      |

## • Analog outputs

|                                      |  |
|--------------------------------------|--|
| <b>Nr.of outputs × groups</b>        | 1 × 1  |
| <b>Common connector</b>              | AGND   |
| <b>Available functions</b>           | AO 0–10 V / 0–20mA<br>Resistance measurement: 0–2 kΩ (Pt/Ni1000) |
| <b>Galvanic isolation</b>            | No   |
| <b>Max. voltage/current</b>          | 10 V / 20 mA   |
| <b>Resolution</b>                    | 12 bits  |
| <b>Conversion speed</b>              | 1 ms   |
| <b>Resistance measurement method</b> | 2wire  |

## • Power supply

|                                    |                       |
|------------------------------------|-----------------------|
| <b>Rated voltage - SELV</b>        | 24 V DC               |
| <b>Power consumption</b>           | Typ. 3 W<br>Max. 12 W |
| <b>Reverse polarity protection</b> | Yes                   |

## • Installation and operating conditions

|                             |   |
|-----------------------------|---|
| <b>Operating conditions</b> | 0 °C .. + 70 °C, relative humidity 10 % .. 95 %, without aggressive substances, condensing vapor and fog    |
| <b>Storing conditions</b>   | - 25 °C .. + 70 °C, relative humidity 10 % .. 95 %, without aggressive substances, condensing vapor and fog |
| <b>Degree of protection</b> | IP 20   |
| <b>IP (IEC 529)</b>         |   |
| <b>Operation position</b>   | Horizontal  |
| <b>Installation</b>         | On 35mm DIN rail into distribution box (holder included)  |
| <b>Connection</b>           | Pluggable terminal blocks   |
| <b>Wire gauge</b>           | Max. 2.5 mm <sup>2</sup>  |

## • Dimensions and weight

|                   |                 |
|-------------------|-----------------|
| <b>Dimensions</b> | 70 × 90 × 60 mm |
| <b>Weight</b>     | 210 g           |

## • Standards compliance

|                             |
|-----------------------------|
| <b>EN 60730-1 ed.3:2012</b> |
| <b>RoHS</b>                 |
| <b>WEEE</b>                 |